

Programming the CLEARARRAY Bulb Replacement Timer

To make changes to the CLEARARRAY bulb replacement timer or to reset it, follow the steps below (Figure 7).

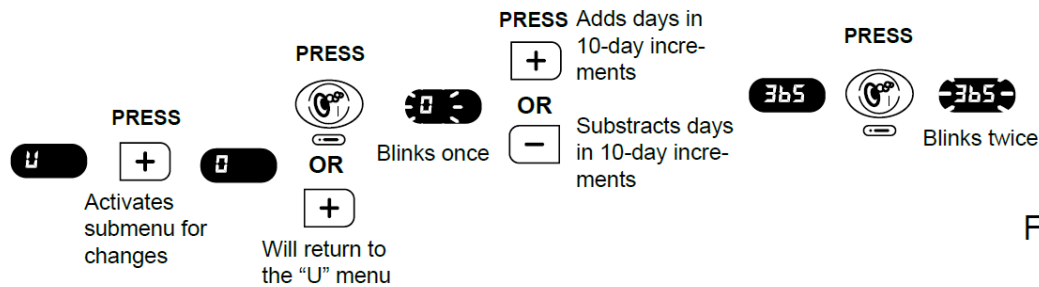


Figure 7

- Press the Menu button three times to display the CLEARARRAY Bulb Replacement Timer Menu. The LED screen will display "U."
- Press the Warmer (+) button to enter the menu. The LED screen will display the number of days remaining or zero.
Note: If you press the Warmer (+) button after the number of days remaining you will revert back to the "U" menu. You will need to repeat step B to re-enter the menu.
- Press the Jets Pump 1 button to access the CLEARARRAY bulb replacement timer. The display on the LED screen will blink once to indicate that the system is ready to accept changes.
- Pressing the Warmer (+) or Cooler (-) button will add or subtract days in increments of 10 days except when 360 is reached. Then a 5-day increment occurs. The range for programming is from 0 to 365 days.
- Once you select the number of days, press the Jets Pump 1 button to confirm the selection. The display of the LED screen will blink twice to indicate that the changes have been accepted. You must press the Jets Pump 1 button to confirm your selection or the current settings will remain active.
Note: If no button is pressed within 5 seconds of each selection the screen will revert back to the Main Menu and the current settings will remain active. These instructions are meant only to work on 2014+ [J-300 Collection Jacuzzi Hot Tubs](#).

